


# NovaSeptum® GO Transfer Unit

## Product Description

The NovaSeptum® GO Transfer Unit is intended for transfer applications. The transfer unit is available with a 2 mm needle and must be used with a NovaSeptum® GO holder. For single-use only, it is important to note

that the needle may only penetrate the septum once to ensure proper sealing. A certificate of quality is available on our website.

## NovaSeptum® GO Transfer Unit Configuration

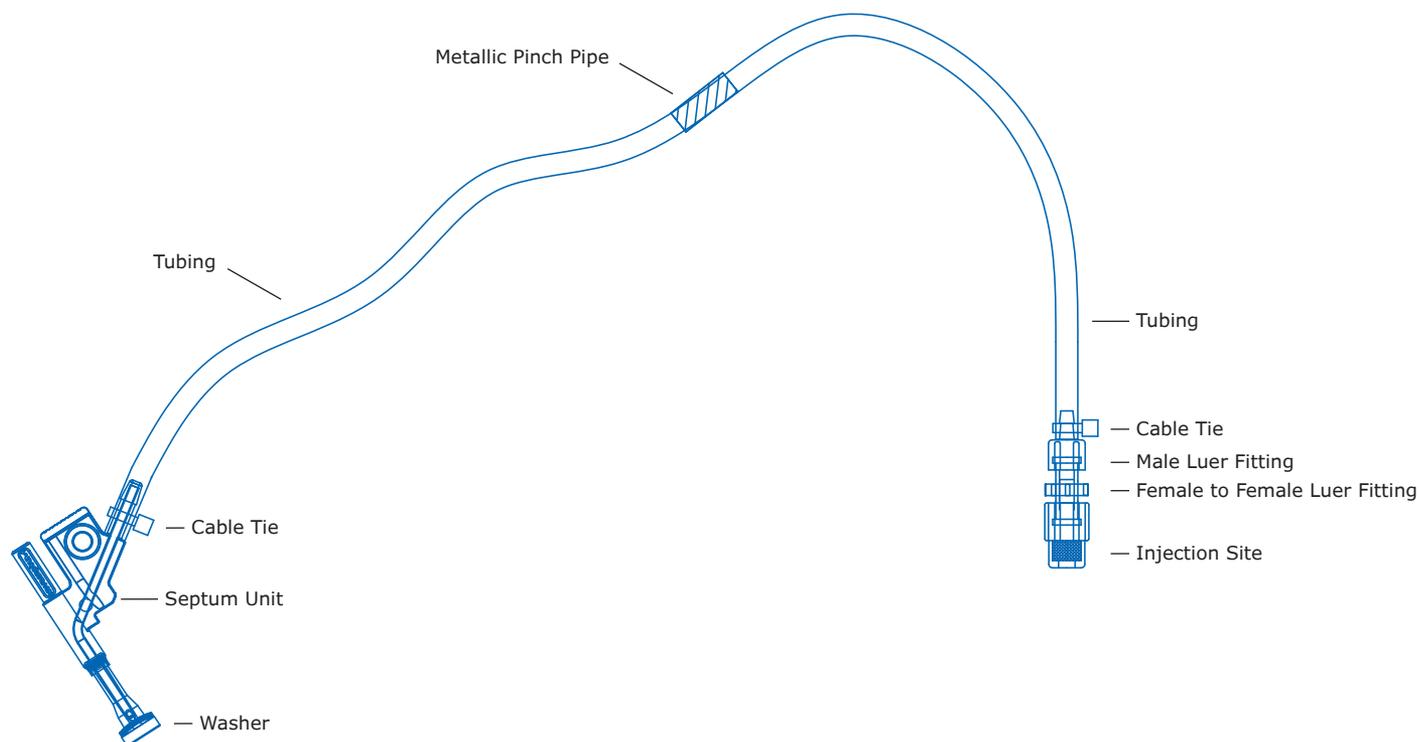

## Specifications

Materials of Construction			
Septum	Medical-grade platinum-cured silicone		
Septum Body	2 mm blue polyester		
Septum Cannula	ASTM® 316 L stainless steel		
Metallic Pinch Pipe	Nickel-plated brass		
Cable Tie	Nylon		
Washer	Stainless steel		
Catalogue No.	Transfer Bag	Mele Luer Fitting, Female Luer Fitting	Injection Site
E521-10014	-	Polycarbonate	Polycarbonate/ Polyisoprene
E521-10014	-	Polycarbonate	Polycarbonate/ Polyisoprene
E541-00020	-	Polycarbonate	Polycarbonate/ Polyisoprene
Environmental			
Maximum Operating Pressure	Withstand 0.50 bar (7.25 psi) at 25°C (77°F)		
Operating Temperature	Tube transfer system: Polyethylene: -20 to 50°C (-4 to 122°F); Silicone: -50 to 95°C (-58 to 203°F), C-Flex®: -73 to 132°C (-99 to 270°F)		
Traceability	The packaging label includes the catalogue and lot number as well as the expiration date.		
Sterilization	Beta Irradiation (e-beam) minimum 25 kGy according to ISO® 11137		
Component Material Toxicity	All wetted component materials meet the criteria for Class VI testing based on USP <88> Biological Reactivity, in vivo.		
Endotoxin Level	<2.15 EU/device for all wetted components		
Assembly	This product is manufactured in a clean room environment complying with class 8 according to ISO® 14644-1.		
Packaging	Five transfer units are packaged in one double bag. Five of these double bags are packaged in a single bag. Two of these single bags are packaged in a cardboard box.		

## Ordering Information

Needle Size (mm)	Tubing	Tubing Connector	Qty/pk	Cat. No.
2	500 mm Medical grade Thermoplastic Elastomer	2	3-piece Luer	<b>E511-10014</b>
2	500 mm Silicone	2	3-piece Luer	<b>E521-10014</b>
2	1000 mm C-Flex®	2	3-piece Luer	<b>E541-00020</b>

## To Place an Order or Receive Technical Assistance

Please visit  
[EMDMillipore.com/contactPS](https://www.emdmillipore.com/contactPS)

For additional information, please visit  
[EMDMillipore.com](https://www.emdmillipore.com)

MilliporeSigma  
 400 Summit Drive  
 Burlington, MA 01803

